


对焊环松套钢制管法兰 (HG20599-97)

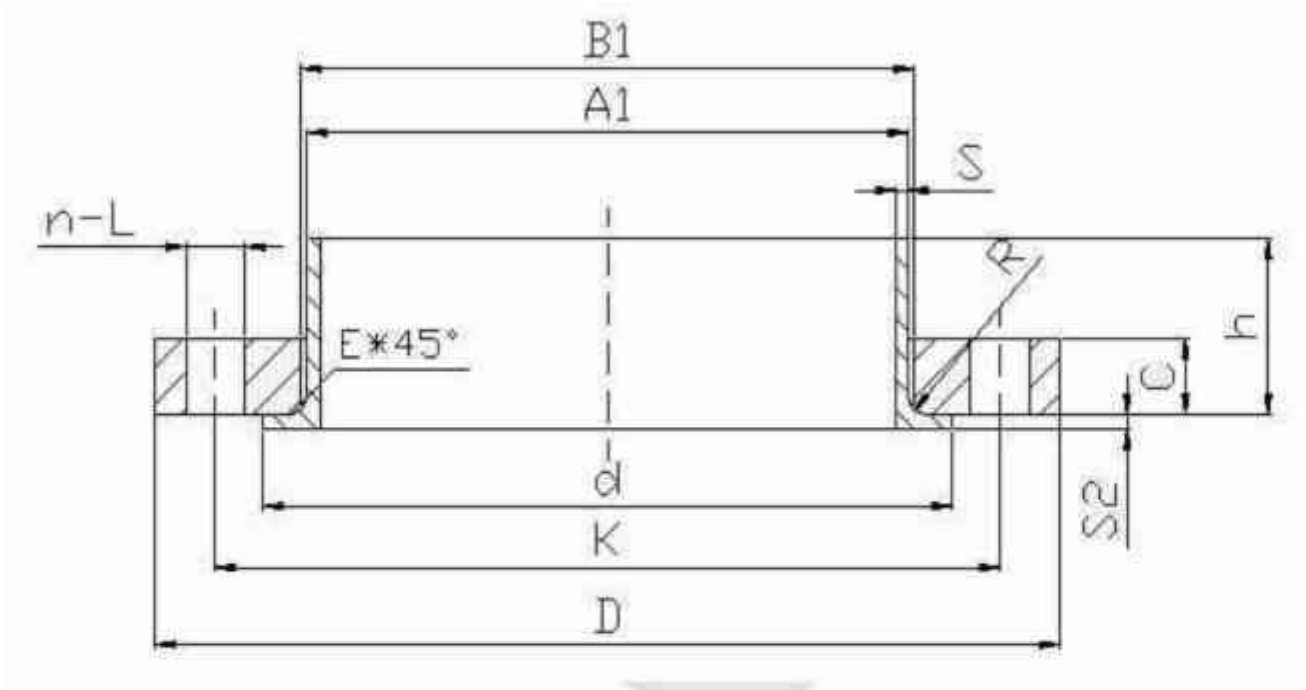

www.docin.com

密封面适用范围

密封面形式	公称压力 (MPa)				
	0.6	1.0	1.6	2.5	4.0
突面 (RF)	DN10-600				

PN0.6MPa

对焊环松套钢制管法兰(HG20599-97)

公称 通径 DN	钢管外径 A1		连接尺寸					法 兰 厚 度 C	法兰内径 B1		圆 角 R1	倒 角 E	对焊环				理论重量	
	A	B	D	K	L	n	Th		A	B			h	d	S	S2	对焊环	法兰
10	17.2	14	75	50	11	4	M10	12	21	18	2	2	28	33	1.8	1.8	0.03	0.36
15	21.3	18	80	55	11	4	M10	12	25	22	2	2	30	38	2	2	0.04	0.4
20	26.9	25	90	65	11	4	M10	14	31	29	2	2	32	48	2.3	2.3	0.08	0.58
25	33.7	32	100	75	11	4	M10	14	38	36	3	3	35	58	2.6	2.6	0.11	0.71
32	42.4	38	120	90	14	4	M12	16	47	42	3	3	35	69	2.6	2.6	0.16	1.17
40	48.3	45	130	100	14	4	M12	16	53	50	3	3	38	78	2.6	2.6	0.19	1.34
50	60.3	57	140	110	14	4	M12	16	65	62	3	3	38	88	2.9	2.9	0.27	1.48
65	76.1	76	160	130	14	4	M12	16	81	81	3	3	38	108	2.9	2.9	0.37	1.8
80	88.9	89	190	150	18	4	M16	18	94	94	4	4	42	124	3.2	3.2	0.52	2.88
100	114.3	108	210	170	18	4	M16	18	120	114	4	4	45	144	3.6	3.6	0.71	3.31
125	139.7	133	240	200	18	8	M16	18	145	139	4	4	48	174	4	4	1.07	3.96
150	168.3	159	265	225	18	8	M16	20	174	165	4	4	48	199	4.5	4.5	1.43	4.98
200	219.1	219	320	280	18	8	M16	22	226	226	5	5	55	254	5.9	5.9	2.62	6.61
250	273	273	375	335	18	12	M16	24	281	281	5	5	60	309	6.3	6.3	3.71	8.54
300	323.9	325	440	395	22	12	M20	24	333	334	5	5	62	363	7.1	7.1	5.04	11.3
350	355.6	377	490	445	22	12	M20	26	365	386	5	5	62	413	7.1	7.1	6.75	13.7
400	406.4	426	540	495	22	16	M20	28	416	435	5	5	65	463	7.1	7.1	8.04	16.3
450	457	480	595	550	22	16	M20	30	467	490	5	5	65	518	7.1	7.1	9.52	19.6
500	508	530	645	600	22	20	M20	32	519	541	6	6	68	568	7.1	7.1	11.4	22.4
600	610	630	755	705	26	20	M24	36	622	642	6	6	70	667	7.1	7.1	14.6	32

PN1.0MPa

对焊环松套制管法兰 (HG20599-97)

公称 通径 DN	钢管外径 A1		连接尺寸					法 兰 厚 度 C	法兰内径 B1		圆 角 R1	倒 角 E	对焊环				理论重量	
	A	B	D	K	L	n	Th		A	B			h	d	S	S2	对焊环	法兰
10	17.2	14	90	60	14	4	M12	14	21	18	2	2	35	41	1.8	1.8	0.04	0.6
15	21.3	18	95	65	14	4	M12	14	25	22	2	2	38	46	2	2	0.05	0.67
20	26.9	25	105	75	14	4	M12	16	31	29	2	2	40	56	2.3	2.3	0.09	0.93
25	33.7	32	115	85	14	4	M12	16	38	36	3	3	40	65	2.6	2.6	0.13	1.1
32	42.4	38	140	100	18	4	M16	18	47	42	3	3	42	76	2.6	2.6	0.17	1.83
40	48.3	45	150	110	18	4	M16	18	53	50	3	3	45	84	2.6	2.6	0.2	2.07
50	60.3	57	165	125	18	4	M16	20	65	62	3	3	48	99	2.9	2.9	0.31	2.72
65	76.1	76	185	145	18	4	M16	20	81	81	3	3	48	118	2.9	2.9	0.41	3.25
80	88.9	89	200	160	18	8	M16	20	94	94	4	4	50	132	3.2	3.2	0.56	3.52
100	114.3	108	220	180	18	8	M16	22	120	114	4	4	52	156	3.6	3.6	0.79	4.45
125	139.7	133	250	210	18	8	M16	22	145	139	4	4	55	184	4	4	1.16	5.5
150	168.3	159	285	240	22	8	M20	24	174	165	4	4	55	211	4.5	4.5	1.56	7.41
200	219.1	219	340	295	22	8	M20	24	226	226	5	5	62	266	5.9	5.9	2.84	8.97
250	273	273	395	350	22	12	M20	26	281	281	5	5	68	319	6.3	6.3	3.96	11.4
300	323.9	325	445	400	22	12	M20	28	333	334	5	5	68	370	7.1	7.1	5.26	13.9
350	355.6	377	505	460	22	16	M20	30	365	386	5	5	68	429	7.1	7.1	7.34	18.2
400	406.4	425	565	515	26	16	M24	32	416	435	5	5	72	480	7.1	7.1	8.74	23.5
450	457	480	615	565	26	20	M24	35	467	490	5	5	72	530	7.1	7.1	10.1	26.9
500	508	530	670	620	26	20	M24	38	519	541	6	6	75	582	7.1	7.1	12.1	33.4
600	610	630	780	725	30	20	M27	42	622	642	6	6	80	682	7.1	7.1	15.5	46.1

PN1.6MPa

对焊环松套制管法兰 (HG20599-97)

公称 通径 DN	钢管外径 A1		连接尺寸					法 兰 厚 度 C	法兰内径 B1		圆 角 R1	倒 角 E	对焊环				理论重量	
	A	B	D	K	L	n	Th		A	B			h	d	S	S2	对焊环	法兰
10	17.2	14	90	60	14	4	M12	14	21	18	2	2	35	41	1.8	1.8	0.04	0.6
15	21.3	18	95	65	14	4	M12	14	25	22	2	2	38	46	2	2	0.05	0.67
20	26.9	25	105	75	14	4	M12	16	31	29	2	2	40	56	2.3	2.3	0.09	0.93
25	33.7	32	115	85	14	4	M12	16	38	36	3	3	40	65	2.6	2.6	0.13	1.1
32	42.4	38	140	100	18	4	M16	18	47	42	3	3	42	76	2.6	2.6	0.17	1.83
40	48.3	45	150	110	18	4	M16	18	53	50	3	3	45	84	2.6	2.6	0.2	2.07
50	60.3	57	165	125	18	4	M16	20	65	62	3	3	48	99	2.9	2.9	0.31	2.72
65	76.1	76	185	145	18	4	M16	20	81	81	3	3	48	118	2.9	2.9	0.41	3.25
80	88.9	89	200	160	18	8	M16	20	94	94	4	4	50	132	3.2	3.2	0.56	3.52
100	114.3	108	220	180	18	8	M16	22	120	114	4	4	52	156	3.6	3.6	0.79	4.45
125	139.7	133	250	210	18	8	M16	22	145	139	4	4	55	184	4	4	1.16	5.5
150	168.3	159	285	240	22	8	M20	24	174	165	4	4	55	211	4.5	4.5	1.56	7.41
200	219.1	219	340	295	22	12	M20	26	226	226	5	5	62	266	5.9	5.9	2.84	9.41
250	273	273	405	355	26	12	M24	28	281	281	5	5	70	319	6.3	6.3	3.96	13.3
300	323.9	325	460	410	26	12	M24	32	333	334	5	5	78	370	7.1	7.1	5.26	18.1
350	355.6	377	520	470	26	16	M24	35	365	386	5	5	82	429	8	8	8.25	23.9
400	406.4	425	580	525	30	16	M27	38	416	435	5	5	85	480	8	8	9.83	31.1
450	457	480	640	585	30	20	M27	42	467	490	5	5	87	548	8	8	12.3	39.2
500	508	530	715	650	33	20	M30*2	46	519	541	6	6	90	609	8	8	15.2	55.8
600	610	630	840	770	36	20	M33*2	52	622	642	6	6	95	720	8.8	8.8	22.1	85.7

PN2.5MPa

对焊环松套制管法兰 (HG20599-97)

公称 通径 DN	钢管外径 A1		连接尺寸					法 兰 厚 度 C	法兰内径 B1		圆 角 R1	倒 角 E	对焊环				理论重量	
	A	B	D	K	L	n	Th		A	B			h	d	S	S2	对焊环	法兰
10	17.2	14	90	60	14	4	M12	14	21	18	2	2	35	41	1.8	1.8	0.04	0.6
15	21.3	18	95	65	14	4	M12	14	25	22	2	2	38	46	2	2	0.05	0.67
20	26.9	25	105	75	14	4	M12	16	31	29	2	2	40	56	2.3	2.3	0.09	0.93
25	33.7	32	115	85	14	4	M12	16	38	36	3	3	40	65	2.6	2.6	0.14	1.1
32	42.4	38	140	100	18	4	M16	18	47	42	3	3	42	76	2.6	2.6	0.17	1.83
40	48.3	45	150	110	18	4	M16	18	53	50	3	3	45	84	2.6	2.6	0.22	2.07
50	60.3	57	165	125	18	4	M16	20	65	62	3	3	48	99	2.9	2.9	0.31	2.72
65	76.1	76	185	145	18	8	M16	22	81	81	3	3	52	118	2.9	2.9	0.46	3.4
80	88.9	89	200	160	18	8	M16	24	94	94	4	4	58	132	3.2	3.2	0.59	4.23
100	114.3	108	235	190	22	8	M20	26	120	114	4	4	65	156	3.6	3.6	0.93	6.15
125	139.7	133	270	220	26	8	M24	28	145	139	4	4	68	184	4	4	1.29	8.31
150	168.3	159	300	250	26	8	M24	30	174	165	4	4	75	211	4.5	4.5	1.9	10.6
200	219.1	219	360	310	26	12	M24	32	226	226	5	5	80	274	6.3	6.3	3.7	13.9
250	273	273	425	370	30	12	M27	35	281	281	5	5	88	330	7.1	7.1	5.69	19.6
300	323.9	325	485	430	30	16	M27	38	333	334	5	5	92	389	8	8	8.5	25.6
350	355.6	377	555	490	33	16	M30*2	42	365	386	5	5	100	448	8	8	10.9	36.6
400	406.4	425	620	550	36	16	M33*2	46	416	435	5	5	110	503	8.8	8.8	14.7	49.4
450	457	480	670	600	36	20	M33*2	50	467	490	5	5	110	548	8.8	8.8	17.1	56.3
500	508	530	730	660	36	20	M33*2	56	519	541	6	6	125	609	10	10	24.8	74
600	610	630	845	770	39	20	M36*3	68	622	642	6	6	125	720	11	11	33.4	113.7

PN4.0MPa

对焊环松套制管法兰 (HG20599-97)

公称 通径 DN	钢管外径 A1		连接尺寸					法 兰 厚 度 C	法兰内径 B1		圆 角 R1	倒 角 E	对焊环				理论重量	
	A	B	D	K	L	n	Th		A	B			h	d	S	S2	对焊环	法兰
10	17.2	14	90	60	14	4	M12	14	21	18	2	2	35	41	1.8	1.8	0.04	0.6
15	21.3	18	95	65	14	4	M12	14	25	22	2	2	38	46	2	2	0.05	0.67
20	26.9	25	105	75	14	4	M12	16	31	29	2	2	40	56	2.3	2.3	0.09	0.93
25	33.7	32	115	85	14	4	M12	16	38	36	3	3	40	65	2.6	2.6	0.14	1.1
32	42.4	38	140	100	18	4	M16	18	47	42	3	3	42	76	2.6	2.6	0.17	1.83
40	48.3	45	150	110	18	4	M16	18	53	50	3	3	45	84	2.6	2.6	0.22	2.07
50	60.3	57	165	125	18	4	M16	20	65	62	3	3	48	99	2.9	2.9	0.31	2.72
65	76.1	76	185	145	18	8	M16	22	81	81	3	3	52	118	2.9	2.9	0.46	3.4
80	88.9	89	200	160	18	8	M16	24	94	94	4	4	58	132	3.2	3.2	0.59	4.23
100	114.3	108	235	190	22	8	M20	26	120	114	4	4	65	156	3.6	3.6	0.93	6.15
125	139.7	133	270	220	26	8	M24	28	145	139	4	4	68	184	4	4	1.29	8.31
150	168.3	159	300	250	26	8	M24	30	174	165	4	4	75	211	4.5	4.5	1.9	10.6
200	219.1	219	375	320	30	12	M27	36	226	226	5	5	88	284	6.3	6.3	3.91	17.5
250	273	273	450	385	33	12	M30*2	42	281	281	5	5	105	345	7.1	7.1	6.13	28.6
300	323.9	325	515	450	33	16	M30*2	48	333	334	5	5	115	409	8	8	9.29	40.3
350	355.6	377	580	510	36	16	M33*2	55	365	386	5	5	125	465	8.8	8.8	12.8	56.5
400	406.4	425	660	585	39	16	M36*3	60	416	435	5	5	135	535	11	11	20.6	82.1
450	457	480	685	610	39	20	M36*3	66	467	490	5	5	135	560	12.5	12.5	25.1	80.8
500	508	530	755	670	42	20	M39*3	72	519	541	6	6	140	615	14.2	14.2	35.6	107.4
600	610	630	890	795	48	20	M45*3	84	622	642	6	6	150	735	16	16	50.5	172.8